




Quick Start Guide

1. Your new logger comes ready to go. Simply press and hold the start button until the green LED lights up to start logging.


EL-CC-1




EL-CC-2









EL-PDF-1



2. Now place your logger in the location you want to monitor.

Once logging, pressing the  button will light up an LED only on PDF, CC flashes, to give a quick indication of the status. It will also add a marker to the data to show that you have checked it. No alarms will be triggered in the first 30 minutes to allow the logger to settle at the monitored conditions periodically.

	Red + Green single flash Logger is ready to start new logging session	Push Start / Stop button
	Green single flash The data logger is currently logging No alarm has been triggered	No action required
	Red single flash The data logger is currently logging An alarm has been triggered!	View data log after use
	Green double flash The data logger's memory is full or the logger has been stopped. No alarm was triggered during the session.	View data log after use
	Red double flash The data logger's memory is full or the logger has been stopped. An alarm was triggered during the session!	View data log after use
	No LEDs flash The data logger has a flat battery	Contact your distributor for a new logger

EL-CC-1 & EL-CC-2

USING THE SOFTWARE


3. When you are ready to view the recorded data on your logger, download the EasyLog CC software (compatible with 32-bit and 64-bit versions of Windows 7, 8 and 10). Visit www.easylogcc.com and click 'DOWNLOAD'.

4. To save your data, remove the logger from the plastic sleeve and connect it to a USB port. Open the EasyLog CC software and click on Save Data. This will automatically open up your readings in the EasyLogGraph software, where you can view your data or export it in various formats.

EL-PDF-1 (no software)

3. When you are ready to view the recorded data on your logger, press and hold the button to stop the current logging session. Remove the logger from the plastic sleeve and connect it to a USB port.

4. Copy the file off the device as if it were a memory stick. For large logging sessions this could take up to 30 seconds.

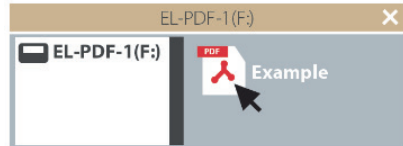

EL-CC-1 & EL-PDF-1 only

5. Press the button to start a new data logging session. To maintain IP67 status, the logger must be placed in Lascar's accessory bag, EL-CC-BAG*. The EL-CC-2 loggers are single use.



*EL-CC-BAG available for sale on our website <https://www.lascarelectronics.com/easylog-data-logger-el-cc-bag/>

IMPORTANT SAFETY INFORMATION



Repairing or Modifying

Never attempt to repair or modify Lascar products. Dismantling them, other than for the purpose of changing replaceable batteries, may cause damage that is not covered under the warranty. Servicing should only be provided by an authorized supplier.



Disposal and Recycling Information

You must dispose of Lascar products in accordance with relevant laws and regulations. They contain electronic components and lithium batteries and therefore must be disposed of separately from household waste.

Distribuido por:


Lazo de Control
Automatización y Medio Ambiente

www.lazodecontrol.com
ventas@lazodecontrol.com
Jr. Salaverry 160 - Magdalena
+51 960 810 089